




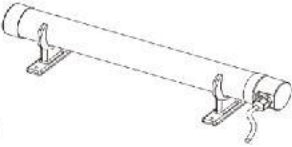

TUBULAR HEATER INSTRUCTION MANUAL

Picture	Model	Function
	Standard series	basic model, with thermal cut off.
	Thermostat series	with power indicator, with adjustable thermostat, with thermal cut off.

YOU SHOULD READ THE MANUAL CAREFULLY BEFORE USING, AND KKEP THE MANUAL WELL.



1. Safety Regulations

	<p>This item gets very hot: do not touch the tubular heater when it is switched on.</p> <p>Do not cover the tubular heater as this will cause overheating.</p> <p>Never place the tubular heater directly on the floor without using the feet.</p>
---	--

<p>WARNING: Check product before use: if cord is damaged, it must be replaced by the manufacturer if still under warranty, or a similar qualified person to avoid any hazards</p>
--

- During the first use the heater may emit a small amount of vapour which is perfectly normal. The reason for this is the heating wire element is coated with some lubricant oil during the production process. This will stop after approx. 5 minutes after the first use and is not a safety concern.

- It is important all electrical devices are plugged into power that is protected by a safety switch.
- The tubular heater is not suitable for use outdoors in damp weather.
- Do not submerge into water.
- Place in a safe place away from flammable objects.
- Do not place flammable liquids or gasses near the heater.
- Do not place the heater directly below the socket outlet.
- Do not let the power cord over hang or touch the tube.
- Keep out of reach of children and animals – product gets hot to touch.
- This is not a toy.
- Switch off appliance when not in use.
- Do not hold the tubular heater by the cord.
- If using an extension cord it must be as short as possible and fully extended.
- Check heater regularly if using with a timer or any other device that switches the tubular heater on or off automatically.
- This leaflet should be retained for instructions on use.

2.Cleaning

Ensure product is unplugged from the mains. Ensure product is completely cold.

Wipe with a damp cloth, then finish by drying with a soft cloth. DO NOT use abrasive cleaning powders, clothes or metal polishes on any part of the tubular heater as this will cause damage.

3.Thermal Cut-out


The appliance is fitted with a thermal cut-out. Once the tubular heater has cooled down it will re-set itself automatically. It will then switch on and off until the reason for overheating has been removed.

4. Operation


Please install horizontally, prohibited vertically.

A: Operation for Tubular Heater Thermostat Series


Step 1. Install the bracket as the picture shows.




Step 2. Fix the tubular heater on the wall or on the floor like the following picture shows.



Step 3. Ensure the plug is plugged into the socket, and then turn on the switch, then you will see the power light is on. Turn the thermostat knob in a clockwise direction until it reaches the maximum setting (Like the picture showed)

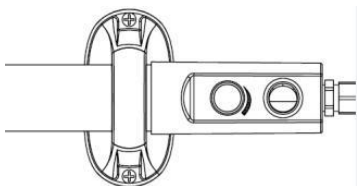


Notice: The heater should have some distance from the wall or between 2 heaters.

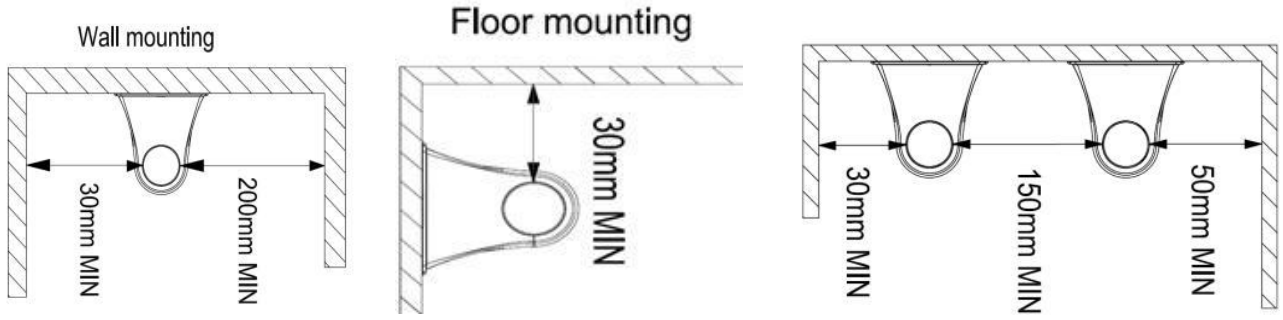


B: Operation for tubular heater TH01A series

Notice: DO NOT SWITCH POWER ON TO THE HEATER UNTIL IT IS SECURELY MOUNTED.

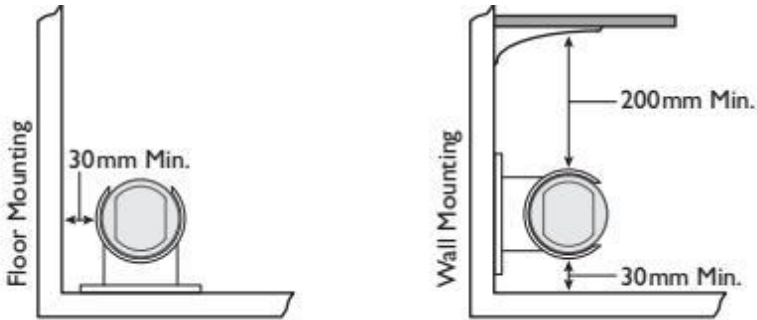

Step 1. Install the bracket as the picture shows.

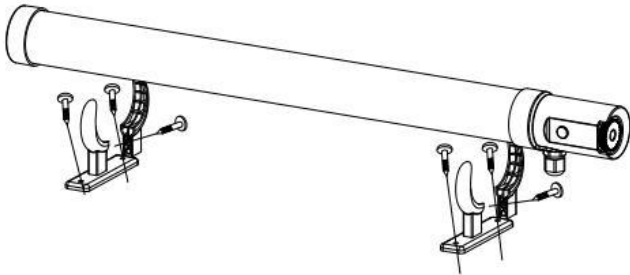

Step 2. Fix the tubular heater on the wall or on the floor like the following picture shows.



6. Tubular Heater Notice:

- The heater is fitted with a safety device which will switch off the heater in case of accidental overheating.
- Make sure that any causes of overheating, such as obstructions, are removed and plug the appliance in again.
- Please turn off the power when nobody at home or no need to keep heating, it is energy saving and safer.

7.Tubular heater Specifications

Model No.	Power	Electrical Supply	IP Rating	Product Size ±5mm
MOR-TBH-1FT-TMO	55W	220-240V ,50 Hz	IP44	510*100*100
MOR-TBH-2FT-TMO	90W	220-240V ,50 Hz	IP44	710*100*100
MOR-TBH-3FT-TMO	135W	220-240V ,50 Hz	IP44	1010*100*100
MOR-TBH-4FT-TMO	190W	220-240V ,50 Hz	IP44	1510*100*100
MOR-TBH-1FT	60W	220-240V ,50 Hz	IP55	310*100*80
MOR-TBH-2FT	120W	220-240V ,50 Hz	IP55	610*100*80
MOR-TBH-3FT	180W	220-240V ,50 Hz	IP55	910*100*80
MOR-TBH-4FT	240W	220-240V ,50 Hz	IP55	1220*100*80
MOR-TBH-5FT	300W	220-240V ,50 Hz	IP55	1520*100*80
MOR-TBH-6FT	360W	220-240V ,50 Hz	IP55	1820*100*80

8.Warranty

This product is guaranteed under warranty and covers defects in material or workmanship from 1 year of date of purchase. The original bill of purchase (with purchase date) must be submitted.

The warranty will not apply in cases of: Misuse: by non-compliance of the instructions, normal wear and tear, incorrect use, e.g. overloading, non-approved accessories, force or damaged caused by external forces, if the plug has been tampered with or removed, partially or completely dismantled product, or interference by non-qualified persons.

9.Disposal



This symbol indicates that this product must not be placed in general household waste. It should be sent to a separate recycling facility for recovery, check Local Authorities for details.

By responsible recycling and separating this product from other household waste it will help protect the environment and human health, as the volume of waste sent to incinerators or land-fills will be reduced and natural resources conserved.